

2

20000828091



USAARL REPORT NO. 85-2

**EFFECTS OF XM-40 CHEMICAL PROTECTIVE MASK ON  
REAL-EAR ATTENUATION AND SPEECH INTELLIGIBILITY  
CHARACTERISTICS OF THE SPH-4 AVIATOR HELMET**

AD-A153 848

Reproduced From  
Best Available Copy

By  
William R. Nelson  
Dan T. Mozo

DTIC  
ELECTE  
MAY 20 1985  
S D B

SENSORY RESEARCH DIVISION

DISTRIBUTION STATEMENT A  
Approved for public release  
Distribution Unlimited

February 1985

U.S. ARMY AFRC MEDICAL RESEARCH LABORATORY  
FORT RUCKER, ALABAMA 36362

DTIC FILE COPY

85

4

20

USAARL

## NOTICE

### Qualified Requesters

Qualified requesters may obtain copies from the Defense Technical Information Center, Cameron Station, Alexandria, Virginia, 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from the Defense Technical Information Center.

### Change of Address

Organizations receiving reports from the US Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

### Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.


### Disclaimer


The views, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

### Human Use


Human subjects participated in these studies after giving free and informed voluntary consent. Investigators adhered to AR 70-25 and USAMRDC Reg 70-25 on Use of Volunteers in Research.

### Reviewed:

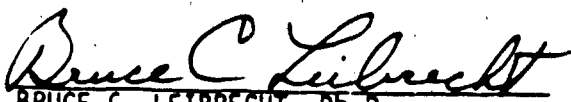  
BRUCE C. LEIBRECHT, PH.D.  
LTC, MS  
Director, Sensory Research Division

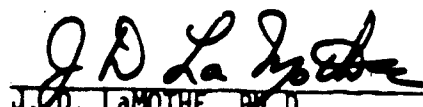  
J.D. LaMOTHE, PH.D.  
LTC(P), MS  
Chairman, Scientific Review  
Committee

### Released for Publication:

  
DUDLEY R. PRICE  
Colonel, MC, SFS  
Commanding

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE   |                                     | READ INSTRUCTIONS<br>BEFORE COMPLETING FORM   |
|---|-------------------------------------|---|
| 1. REPORT NUMBER<br>USAARL Report No. 85-2  | 2. GOVT ACCESSION NO.<br>AD-A153848 | 3. RECIPIENT'S CATALOG NUMBER   |
| 4. TITLE (and Subtitle)<br>Effects of XM-40 Chemical Protective Mask on Real-Ear Attenuation and Speech Intelligibility Characteristics of the SPH-4 Aviator Helmet   |                                     | 5. TYPE OF REPORT & PERIOD COVERED  |
| 7. AUTHOR(s)<br>William R. Nelson and Ben T. Mozo   |                                     | 6. PERFORMING ORG. REPORT NUMBER  |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>Sensory Research Division<br>US Army Aeromedical Research Laboratory<br>Fort Rucker, AL 36362  |                                     | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS<br>62777A, 3E16277A878, AC, 135 |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>US Army Medical Research and Development Command<br>Fort Detrick<br>Frederick, MD 21701  |                                     | 12. REPORT DATE<br>February 1985  |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)   |                                     | 13. NUMBER OF PAGES<br>24   |
|   |                                     | 15. SECURITY CLASS. (of this report)<br>Unclassified  |
|   |                                     | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE  |
| 16. DISTRIBUTION STATEMENT (of this Report)<br>Approved for public release; distribution unlimited.   |                                     |   |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)  |                                     |   |
| 18. SUPPLEMENTARY NOTES   |                                     |   |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br>Chemical Protective Mask, Real-Ear Attenuation, Speech Intelligibility, Noise, Aviator Helmet, SPH-4, Microphone Position, Hearing Conservation, Voice Communication. |                                     |   |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)<br>See reverse.   |                                     |   |

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

ABSTRACT:

Chemical Defense (CD) measures depend primarily on the use of protective clothing and equipment. Adequate protection only can be achieved if each item in the CD ensemble is compatible with every other item. The design or modification of each component must give consideration to its impact on the performance of all items. This study investigated the effects of the XM-40 Chemical Protective (CP) Mask on the protective functions of the SPH-4 aviator helmet. Based on the results it was concluded that the XM-40 compromised the noise attenuation and speech communication functions of the SPH-4.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

# TABLE OF CONTENTS

|  | PAGE NO. |
|--|----------|
| List of Tables. . . . .                                      | 2        |
| List of Figures . . . . .                                    | 2        |
| Introduction. . . . .  | 3        |
| Methods and Instrumentation . . . . .                        | 3        |
| Real-Ear Attenuation. . . . .                                | 3        |
| Intelligibility . . . . .                                    | 4        |
| Results and Discussion. . . . .                              | 7        |
| Real-Ear Attenuation. . . . .                                | 7        |
| Speech Intelligibility. . . . .                              | 7        |
| Conclusions and Recommendations . . . . .                    | 10       |
| References. . . . .  | 11       |
| Appendixes   |          |
| A. Various Views of Three Prototype XM-40 CP Masks . . . . . | 12       |
| B. List of Equipment Manufacturers . . . . .                 | 18       |

|                    |  |
|--------------------|--|
| Accession For      |  |
| NTIS GRA&I         | <input checked="checked" type="checkbox"/> |
| DTIC TAB           | <input type="checkbox"/>                   |
| Unannounced        | <input type="checkbox"/>                   |
| Justification      |  |
| By                 |  |
| Distribution/      |  |
| Availability Codes |  |
| Avail and/or       | Special                                    |
| A-1                |  |



## LIST OF TABLES

| TABLE NO. |   | PAGE NO. |
|-----------|---|----------|
| 1         | Conditions Used in the Evaluation of<br>Speech Intelligibility . . . . .  | 6        |
| 2         | Octave-band Sound Pressure Levels of the<br>Simulated UH-60A Noise Environment . . . . .  | 7        |
| 3         | Mean and Standard Deviations of Real-Ear<br>Attenuation Values Measured in dB for SPH-4<br>Helmet with and without the XM-40 CP Mask. . . . . | 8        |
| 4         | Experimental Listener Conditions, Talker<br>with SPH-4 Only. . . . .  | 8        |
| 5         | Experimental Talker Conditions, Listeners<br>with SPH-4 Only. . . . .   | 9        |

## LIST OF FIGURES

| FIGURE NO. |  | PAGE NO. |
|------------|--|----------|
| 1          | Real-Ear Attenuation Test System . . . . . | 5        |

## INTRODUCTION

The use of protective equipment by today's soldier is essential to enhance and ensure his ability to perform on the battlefield. The soldier's protective equipment must be designed with its effect on the total system being a primary consideration.

This study investigated the effects of three prototype versions of the XM-40 Chemical Protective (CP) mask on the hearing protective and communicative functions of the SPH-4 aviator helmet. The effects of the masks on hearing protection were determined by a comparison of the real-ear attenuation for the SPH-4 with and without the mask. The effects of the masks on communication were assessed in terms of speech intelligibility in two modes. They were (1) a comparison of the listener's ability to discriminate words with and without the mask when the speaker used the standard SPH-4 with its standard boom microphone; and (2) a comparison of the listener's ability to discriminate words while wearing a standard SPH-4 when the speaker was wearing each of the three prototype masks. The primary difference between the three masks was in the configuration of the microphone within the mask.

The request for this evaluation was initiated by the US Army Aviation Board.

## METHODS AND INSTRUMENTATION

### REAL-EAR ATTENUATION

The real-ear attenuation of the SPH-4 helmet, when worn in combination with one of the three CP masks, was measured using the ANSI Standard S3.19-1974. Since the principle difference between the three prototypes was the microphone configuration inside the mask and since in this case the microphone position does not affect attenuation. It was deemed appropriate to test only one mask prototype for attenuation. Ten listeners were college students with normal hearing. They were required to have hearing thresholds for both ears not greater than 10 dB at the 250-1000 Hertz test frequencies and no higher than 20 dB at any other test frequency as measured on a standard audiometry (ANSI S3.6-1969). The same listeners were used to evaluate the real-ear attenuation characteristic of the same SPH-4 with and without the mask.

The real-ear attenuation measurement was conducted in a custom-built Tracoustics Corporation Audiometric Examination Room\* measuring 10'X9'4"X6'6" (1XWXh) located at the Acoustical Sciences Research Group Laboratory, Sensory

---

\*See Appendix B.

Research Division, United States Aeromedical Research Laboratory, Fort Rucker, Alabama. This room had been modified to give the reverberant characteristics specified in the standard.

The signals used in the test were generated and controlled by the instrumentation shown in Figure 1. The noise generator (Bruel and Kjaer (B&K) Type 1405)\* was set to output white noise into the band pass filter, B&K Type 1618. The electronic switch, Grason-Stadler Type 1287B\*, was pulsed with a one Hertz symmetric square wave control signal. The rise and fall time of the electronic switch was adjusted to 30 milliseconds to exclude audible transients during on-off or off-on transitions of the test signal. The spectrum shaper was used to provide an equalized output sound pressure level at the listener's head position over the total frequency bandwidth of the test signals. The step attenuator provided the experimenter with a calibrated control of the test signal to check the subject's reliability. Also it extended the useable range of the recording attenuator. This is useful especially for devices which have high efficiency in the low frequencies.

The recording attenuator was modified to include a 0.5% linearity potentiometer with its wiper shaft position directly related to the attenuator level. This is related directly to the output level of the test signal presented to the listener. The recording attenuator's motor direction was controlled by the subject with a noiseless photoelectric switch. For each test sound, the listener controlled the signal level in the fashion described by Von Békésy (1947) to determine the threshold of audibility. At each reversal point of the tracking process, the potentiometer output was input into the microprocessor control system where it was processed. The system summed 10 reversal points, computed the average, and this output was sent to a printer. The real-ear attenuation was determined by taking the differences between hearing threshold values measured under two conditions. A free-field reference threshold was obtained for all test signals with the listener's head position fixed by the use of a chin rest. An attenuated threshold measurement then was made under identical conditions except the listener wore an SPH-4 with or without a CP mask. A full standard real-ear attenuation test (three attenuation values for each test frequency for each of the 10 listeners) was run for both conditions.

## INTELLIGIBILITY

Appendix A shows various views of the masks evaluated in this experiment. The speech intelligibility of each prototype XM-40 mask worn in combination with the SPH-4 helmet was measured using phonetically balanced (PB) words. The list of words used in this experiment is described in ANSI S3.2-1960 (R1971). Each list consisted of 50 PB words. A different PB word list was assigned to each of five test conditions which are summarized in Table 1.

All speaker conditions utilized PB words recorded by a single speaker in a simulated UH-60A aircraft noise environment shown in Table 2. The speech samples used in this experiment were recorded on a Nagra Model SJ\* magnetic tape recorder. The sample lists were reproduced and adjusted in



# REAL EAR ATTENUATION TEST SYSTEM

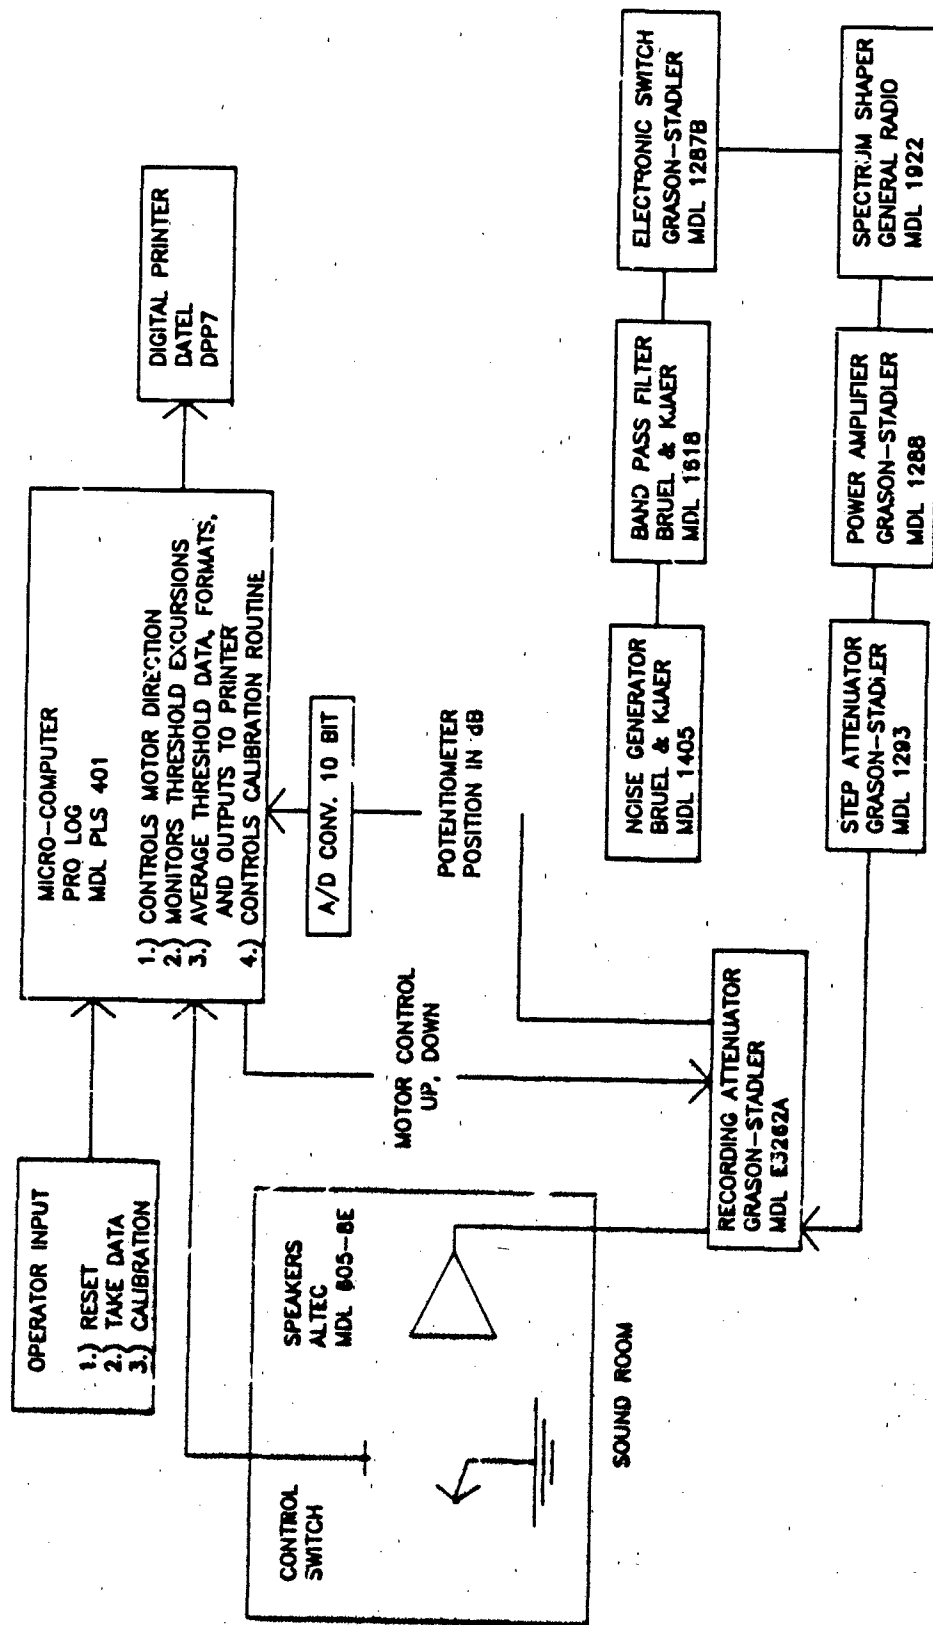


FIGURE 1. Real-Ear Attenuation Test System.

level with a Grason-Stadler 1701 Diagnostic Audiometer\*. Each list was presented to the subject in the simulated aircraft noise environment through the SPH-4 communication system at a level which was 10 dB above speech reception threshold (SRT). The SRT was determined with a "high quality" speech signal presented to the listener for each of the test conditions. The SRT was used to equalize the speech level at the listener's ear for all test conditions. This provides for a measure of intelligibility of each device relative to the other devices in the sample at equal listener levels. The order of the five test conditions was randomized for each subject. It must be understood that the percentage scores may not represent those achievable for conditions different from those tested.

Ten subjects were used in this part of the study. Each subject had normal hearing which is defined as no more than 10 dB hearing loss (reference ANSI S3.6-1969) for the frequencies 250, 500, and 1000 Hertz and no more than 20 dB hearing loss for the frequencies 2000, 3000, 4000, 6000, and 8000 Hertz.

TABLE I  
CONDITIONS USED IN THE EVALUATION OF SPEECH INTELLIGIBILITY.

| Test Condition | Speaker's Condition            | Listener's Condition           |
|----------------|--------------------------------|--------------------------------|
| 1              | Wearing SPH-4                  | Wearing SPH-4                  |
| 2              | Wearing SPH-4                  | Wearing SPH-4 with Prototype C |
| 3              | Wearing SPH-4 with Prototype A | Wearing SPH-4                  |
| 4              | Wearing SPH-4 with Prototype B | Wearing SPH-4                  |
| 5              | Wearing SPH-4 with Prototype C | Wearing SPH-4                  |

Note: Prototype A was marked XM-43.  
 Prototype B was marked 2A/C.  
 Prototype C was marked M15.  
 The prototype designation was made by the US Army Aviation Board. The above mentioned markings were on the CP masks when received at USAARL.

TABLE 2

OCTAVE-BAND SOUND PRESSURE LEVELS OF THE SIMULATED UH-60A NOISE ENVIRONMENT.

Octave-Band Center Frequencies in Hertz

| 63 | 125 | 250 | 500 | 1K | 2K | 4K | 8K | 16K |
|----|-----|-----|-----|----|----|----|----|-----|
| 97 | 97  | 98  | 95  | 89 | 88 | 82 | 83 | 80  |

## RESULTS AND DISCUSSION

## REAL-EAR ATTENUATION

The objective of the real-ear attenuation test was to assess the effects of the XM-40 CP mask on the noise attenuation ability of the SPH-4. The mean real-ear attenuation values by test frequency are shown in Table 3. A comparison of the attenuation results for the SPH-4 and the SPH-4 in combination with the mask reveals little difference in the attenuation of the SPH-4 with and without the mask except at 2 kHz, 6.3 kHz, and 8 kHz. Evaluation of mean attenuation data by individual T-tests with 53 degrees of freedom and  $\alpha = .05$  indicates significant differences at 2 kHz ( $T=2.05$ ), 6.3 kHz ( $T=4.67$ ), and 8 kHz ( $T=2.84$ ). Although the effects on attenuation are less severe than those noted by Mozo (1984) in a similar test of the M-24 and XM-33 CD masks, the current data indicate that high frequency attenuation is compromised significantly when the XM-40 mask is used with the SPH-4 helmet.

## SPEECH INTELLIGIBILITY

The intelligibility portion of the study was divided into two parts: (1) the effects of XM-40 mask configuration on the listener's ability to understand speech and (2) the effects of the various microphone configurations within the mask on the talker's speech intelligibility.

For the first part of the intelligibility test, only one prototype mask was selected. The average listener's speech intelligibility under the two experimental conditions are contained in Table 4. With both speaker and listener wearing the SPH-4 only, the mean intelligibility was 62.4% and the standard deviation was 10.0%. When the listener donned the XM-40 CP mask, the mean was 44.2% with a standard deviation of 11.6%. A repeated measures one-way analysis of variance (ANOVA) as described by Winer (1962) was done on the intelligibility scores. An *a priori* error rate ( $\alpha$ )

TABLE 3

MEAN AND STANDARD DEVIATIONS OF REAL-EAR ATTENUATION VALUES MEASURED IN dB  
FOR SPH-4 HELMET WITH AND WITHOUT THE XM-40 CP MASK.

|                               | Test Frequencies in Hertz |      |      |      |      |       |      |      |       |       |
|-------------------------------|---------------------------|------|------|------|------|-------|------|------|-------|-------|
|                               | 80                        | 125  | 250  | 500  | 1K   | 2K    | 3.5K | 4K   | 5.3K  | 8K    |
| <u>SPH-4</u>                  |                           |      |      |      |      |       |      |      |       |       |
| Mean                          | 16.2                      | 12.7 | 12.3 | 21.7 | 19.4 | 30.1  | 42.6 | 47.4 | 49.7  | 48.1  |
| SD                            | 5.4                       | 4.0  | 3.4  | 4.3  | 3.1  | 2.5   | 3.5  | 3.8  | 5.3   | 6.0   |
| <u>SPH-4 with Prototype C</u> |                           |      |      |      |      |       |      |      |       |       |
| Mean                          | 15.0                      | 12.7 | 12.8 | 22.9 | 19.5 | 31.5  | 41.2 | 46.1 | 42.5  | 43.7  |
| SD                            | 5.4                       | 4.3  | 3.9  | 4.4  | 2.8  | 2.7   | 3.8  | 4.9  | 6.4   | 5.8   |
| <u>T-values</u>               |                           |      |      |      |      |       |      |      |       |       |
|                               | 0.85                      | 0.0  | 0.52 | 1.05 | 0.13 | 2.05* | 1.46 | 1.13 | 4.67* | 2.84* |

\*  $p < .05$ ,  $df = 58$

TABLE 4

EXPERIMENTAL LISTENER'S CONDITIONS, TALKER WITH SPH-4 ONLY.

| Test Condition            | Mean  | Standard Deviation |
|---------------------------|-------|--------------------|
| SPH-4                     | 62.40 | 10.10              |
| SPH-4 with<br>Prototype C | 44.20 | 11.56              |

of .05 was selected. The result of this analysis indicates the XM-40 CD mask significantly degrades a listener's ability to understand speech when compared with the SPH-4 alone ( $F(1,9) = 21.99, p < .001$ ).

As noted, when the talker used the boom microphone under these experimental conditions, mean speech intelligibility was 62.4%. Table 5 contains the mean talker speech intelligibility and standard deviation (SD) for the SPH-4 alone and in combination with the three prototype CD masks. When the talkers donned the XM-40 mask identified as prototype A, average talker speech intelligibility was reduced to 46.4% with  $SD = 7.59$ . Prototype B yielded a mean of 52.4% discrimination and a  $SD = 8.2$ . The mask identified as prototype C resulted in a mean of 49.0% and a  $SD = 9.1$ . To determine the significance of differences in speech intelligibility for the various masks, the data were analyzed using a repeated measure one-way ANOVA model with *a priori* rate ( $\alpha$ ) of .05. The results indicated that the main effect for microphone configuration is significant ( $F(3,27) = 11.40, p < .001$ ). Examination of the results in Table 5 suggest that this significant effect of microphone is a result of the degradation of intelligibility of prototype A and C compared to the SPH-4.

TABLE 5  
EXPERIMENTAL TALKER'S CONDITIONS, LISTENERS WITH SPH-4 ONLY.

| Test Condition            | Mean  | Standard Deviaion |
|---------------------------|-------|-------------------|
| SPH-4                     | 62.40 | 10.10             |
| SPH-4 with<br>Prototype A | 46.40 | 7.59              |
| SPH-4 with<br>Prototype B | 52.40 | 8.15              |
| SPH-4 with<br>Prototype C | 49.00 | 9.06              |

It is important to remember the experimental conditions created a very difficult listening situation in order to magnify the differences in performance of the different prototype microphone configurations as compared with the SPH-4 alone. Better results would be expected from all four devices under more optimal listening conditions.

## CONCLUSIONS AND RECOMMENDATIONS

Based on the results of this study, it is concluded that wearing the XM-40 CP mask with the SPH-4 aviator helmet compromises noise attenuation at 2 kHz, 6.3 kHz, and 8 kHz, but that the compromise of attenuation is less than that experienced with the M-24 and XM-33 CP masks. It was further concluded that wearing the XM-40 mask significantly decreased the ability of a listener to understand speech communication received via an SPH-4 helmet.

With regard to talker intelligibility, the independent variable was microphone configuration within the mask. None of the microphone placements resulted in performance as good as the SPH-4 boom microphone, but of the configurations considered, the prototype identified as "B" was best during the present study.

It is recommended that further efforts be made to improve CP mask compatibility with the SPH-4 helmet. It is further recommended that careful attention be given to microphone placement within the mask. The microphone should never be placed outside the mask.


## REFERENCES

- American National Standards Institute. 1974. Acoustical Society of America. *Standard Method for the Measurement of Real-Ear Protection of Hearing Protectors and Physical Attenuation of Ear Muffs*. S3.19-1974.
- American National Standards Institute. (R 1971) *USA Standard Method for Measurement of Monosyllabic Word Intelligibility*. S3.2-1960.
- American National Standards Institute. *American National Standard Specifications for Audiometers*. S3.6-1969 (R1973).
- Mozo, B. T. 1984. *Effects of Chemical Protective and Oxygen Masks on Attenuation and Intelligibility When Worn with the SPH-4 Helmet*. USAARL Report No. 84-5.
- Tukey, J. W. 1949. Comparing individual means in the analysis of variance. *Biometrics*, 5:99-114.
- Von Bekesy, Georg. 1947. A new audiometer. *Acta Otolaryngologica*, 35:411-422.
- Winer, B. J. 1962. *Statistical principles in experimental design*. New York: McGraw-Hill.


## **APPENDIX A**

**Various Views of Three Prototype XM-40 CP Masks.**




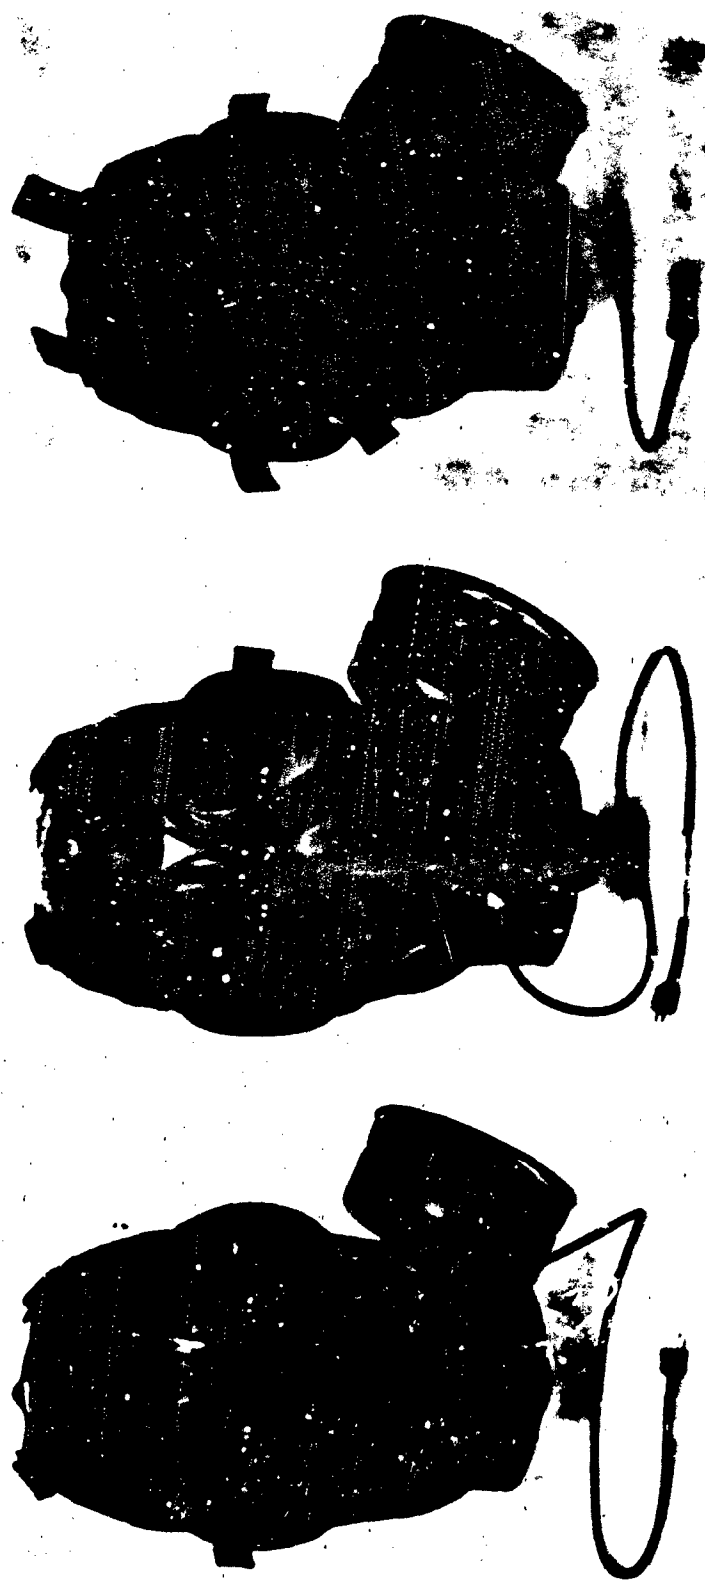

Front views of Prototype XM-40 CP Masks, from left to right, Prototype A, Prototype B, and Prototype C.

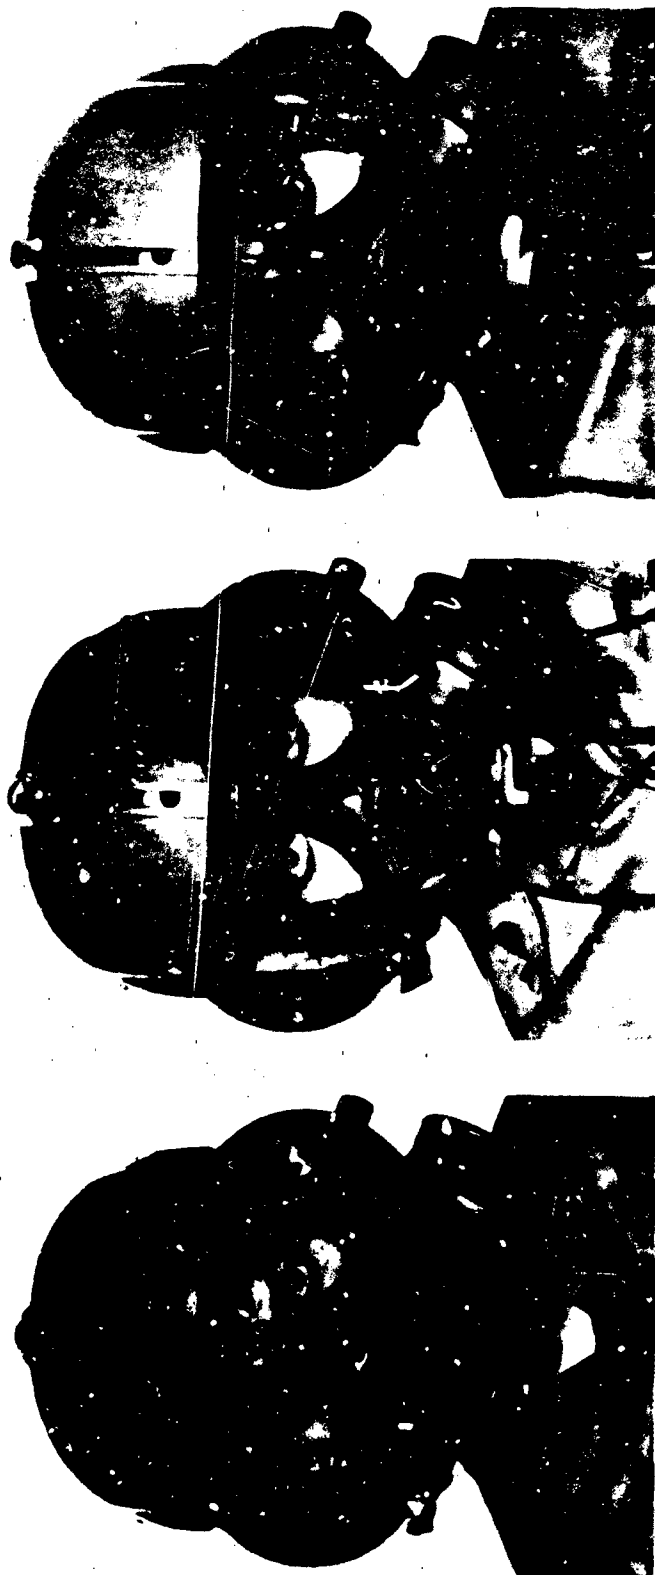

Front views with SPH-4 Helmet, from left to right, Prototype A, Prototype B, and Prototype C.

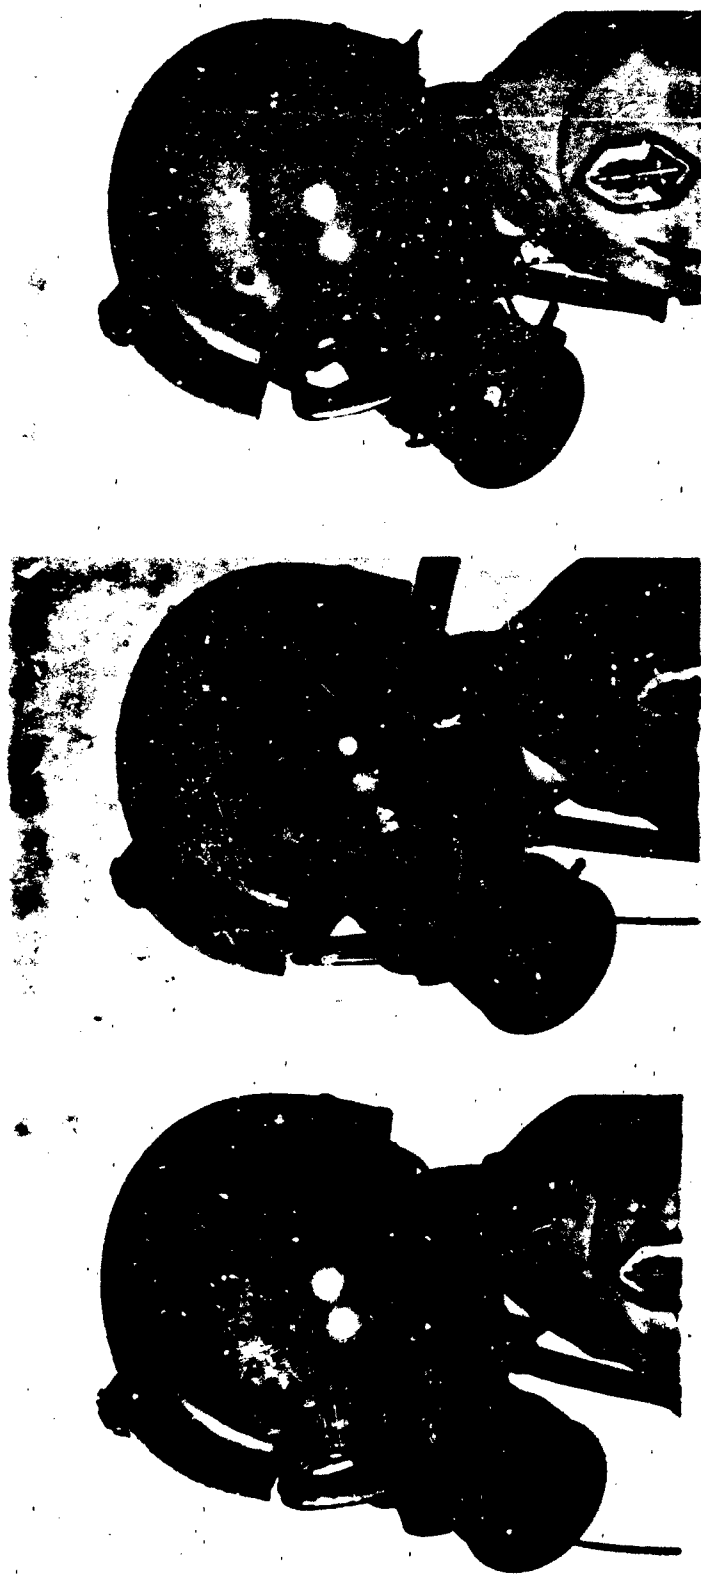

Side views with SPH-4 Helmet, from left to right, Prototype A, Prototype B, and Prototype C.



Side view of three prototype CP masks showing cross-strap configuration. From left to right, Prototype A, Prototype B, and Prototype C.



Views of nose cone of three prototype CP masks showing microphone configuration. From left to right, Prototype A, Prototype B, and Prototype C.

## APPENDIX B

### List of Manufacturers

Altec Lansing Corporation  
1515 S. Manchester Avenue  
Anaheim, California 92803

Bruel and Kjaer Instruments Incorporated  
185 Forest Street  
Marlborough, Massachusetts 01752

Datel Systems Incorporated  
1020 Turnpike Street  
Canton, Massachusetts 02021

Grason-Stadler  
56 Winthrop Street  
Concord, Massachusetts 01742

Nagra Magnetic Recorders Incorporated  
19 West 44th Street, Room 715  
New York, New York 10036

Pro Log Corporation  
2411 Garden Road  
Monterey, California 93940

Tracoustics Incorporated  
P.O. Box 3610  
Austin, Texas 78764

INITIAL DISTRIBUTION

Commander  
US Army Natick Research &  
Development Center  
ATTN: Documents Librarian  
Natick, MA 01760

Commander  
US Army Research Institute of  
Environmental Medicine  
Natick, MA 01760

Naval Submarine Medical Research  
Laboratory  
Medical Library, Naval Submarine Base  
Box 900  
Groton, CT 05340

US Army Avionics Research &  
Development Activity  
ATTN: SAVAA-P-TP  
Fort Monmouth, NJ 07703-5401

Commander/Director  
US Army Combat Surveillance &  
Target Acquisition Laboratory  
ATTN: DELCS-D  
Fort Monmouth, NJ 07703-5304

US Army Research & Development  
Support Activity  
Fort Monmouth, NJ 07703

Commander  
10th Medical Laboratory  
ATTN: Audiologist  
APO New York 09180

Chief  
Benet Weapons Laboratory  
LCWSL, USA ARRADCOM  
ATTN: DRDAR-LCB-TL  
Watervliet Arsenal  
Watervliet, NY 12189

Commander  
Naval Air Development Center  
Biophysics Laboratory (ATTN: G. Kydd)  
Code 60B1  
Warminster, PA 18974

Commander  
Man-Machine Integration System (Code 602)  
Naval Air Development Center  
Warminster, PA 18974

Naval Air Development Center  
Technical Information Division  
Technical Support Detachment  
Warminster, PA 18974

Commander  
Naval Air Development Center  
ATTN: Code 6021 (Mr. Brindle)  
Warminster, PA 18974

Dr. E. Hendler  
Human Factors Applications, Inc.  
295 West Street Road  
Warminster, PA 18974

Uniformed Services University  
of the Health Sciences  
4301 Jones Bridge Road  
Bethesda, MD 20014

Commanding Officer  
Naval Medical Research &  
Development Command  
National Naval Medical Center  
Bethesda, MD 20014

Under Secretary of Defense for  
Research & Engineering  
ATTN: Military Assistant for  
Medical and Life Sciences  
Washington, DC 20301

Director  
Army Audiology & Speech Center  
Walter Reed Army Medical Center  
Washington, DC 20307-5001

COL Franklin H. Top, Jr., MD  
Walter Reed Army Institute  
of Research  
Washington, DC 20307-5100

Commander  
US Army Institute of Dental Research  
Walter Reed Army Medical Center  
Washington, DC 20307-5300

Naval Air Systems Command  
Technical Library Air 950D  
Rm 278, Jefferson Plaza II  
Department of the Navy  
Washington, DC 20361

Naval Research Laboratory Library  
Code 1433  
Washington, DC 20375

Naval Research Laboratory Library  
Shock & Vibration Information Center  
Code 5804  
Washington, DC 20375

Harry Diamond Laboratories  
ATTN: Technical Information Branch  
2800 Powder Mill Road  
Adelphi, MD 20783-1197

Director  
US Army Human Engineering Laboratory  
ATTN: Technical Library  
Aberdeen Proving Ground, MD 21005-5001

US Army Materiel Systems  
Analysis Agency  
ATTN: Reports Processing  
Aberdeen Proving Ground, MD 21005-5017

Commander  
US Army Test & Evaluation Command  
ATTN: AMSTE-AD-H  
Aberdeen Proving Ground, MD 21005-5055

US Army Ordnance Center &  
School Library  
Bldg 3071  
Aberdeen Proving Ground, MD 21005-5201

Director  
US Army Ballistic Research Laboratory  
ATTN: DRXBR-OD-ST (Technical Reports)  
Aberdeen Proving Ground, MD 21005-5066

US Army Environmental Hygiene  
Agency Library  
Bldg E2100  
Aberdeen Proving Ground, MD 21010

Commander  
US Army Medical Research Institute  
of Chemical Defense  
ATTN: SGRD-UV-AO  
Aberdeen Proving Ground, MD 21010-5425

Technical Library  
Chemical Research & Development Center  
Aberdeen Proving Ground, MD 21010-5423

Commander  
US Army Medical Research &  
Development Command  
ATTN: SGRD-RMS (Mrs. Madigan)  
Fort Detrick, MD 21701-5012

Commander  
US Army Medical Research Institute  
of Infectious Diseases  
Fort Detrick, Frederick, MD 21701

Commander  
US Army Medical Bioengineering Research  
& Development Laboratory  
ATTN: SGRD-UBZ-I  
Fort Detrick, Frederick, MD 21701

Dr. R. Newburgh  
Director of Biological Sciences Division  
Office of Naval Research  
600 North Quincy Street  
Arlington, VA 22217

Defense Technical Information Center  
Cameron Station  
Alexandria, VA 22314

US Army Materiel Development &  
Readiness Command  
5001 Eisenhower Avenue  
Alexandria, VA 22333

US Army Foreign Science &  
Technology Center  
ATTN: MTZ  
220 7th Street, NE  
Charlottesville, VA 22901-5396



Commandant  
US Army Aviation Logistics School  
ATTN: ATCQ-TDN  
Fort Eustis, VA 23604

Director  
Applied Technology Laboratory  
USARTL-AVSCOM  
ATTN: Library, Bldg 401  
Fort Eustis, VA 23604

US Army Training & Doctrine Command  
ATTN: ATCD-ZX  
Fort Monroe, VA 23651

Commander  
US Army Training & Doctrine Command  
ATTN: Surgeon  
Fort Monroe, VA 23651-5000

Structures Laboratory Library  
USARTL-AVSCOM  
NASA Langley Research Center  
Mail Stop 266  
Hampton, VA 23665

Naval Aerospace Medical  
Institute Library  
Bldg 1953, Code 102  
Pensacola, FL 32508

US Air Force Armament Development  
& Test Center  
Eglin Air Force Base, FL 32542

Command Surgeon  
US Central Command  
MacDill AFB, FL 33608

US Army Missile Command  
Redstone Scientific Information Center  
ATTN: Document Section  
Redstone Arsenal, AL 35898-5241

Air University Library  
(AUL/LSE)  
Maxwell AFB, AL 36112

Commander  
US Army Aeromedical Center  
Fort Rucker, AL 36362

Commander  
US Army Aviation Center &  
Fort Rucker  
ATTN: ATZQ-CDR  
Fort Rucker, AL 36362

Director  
Directorate of Combat Developments  
Bldg 507  
Fort Rucker, AL 36362

Director  
Directorate of Training Development  
Bldg 502  
Fort Rucker, AL 36362

Chief  
Army Research Institute Field Unit  
Fort Rucker, AL 36362

Commander  
US Army Safety Center  
Fort Rucker, AL 36362

Commander  
US Army Aviation Center &  
Fort Rucker  
ATTN: ATZQ-T-ATL  
Fort Rucker, AL 36362

Commander  
US Army Aircraft Development  
Test Activity  
ATTN: STEBG-MP-QA  
Cairns AAF  
Ft Rucker, AL 36362

President  
US Army Aviation Board  
Cairns AAF  
Fort Rucker, AL 36362

US Army Research & Technology  
Laboratories (AVSCOM)  
Propulsion Laboratory MS 302-2  
NASA Lewis Research Center  
Cleveland, OH 44135

AFAMRL/HEX  
Wright Patterson AFB, OH 45433

US Air Force Institute of  
Technology (AFIT/LDEE)  
Bldg 640, Area B  
Wright-Patterson AFB, OH 45433

John A. Dellinger, MS, ATP  
University of Illinois - Willard Airport  
Savoy, IL 61874

Henry L. Taylor  
Director  
Institute of Aviation  
University of Illinois - Willard Airport  
Savoy, IL 61874

Commander  
US Army Aviation Systems Command  
ATTN: DRSAB-WS  
4300 Goodfellow Boulevard  
St. Louis, MO 63120-1798

Project Officer  
Aviation Life Support Equipment  
ATTN: AMCPO-ALSE  
4300 Goodfellow Boulevard  
St. Louis, MO 63120-1798

Commander  
US Army Aviation Systems Command  
ATTN: SGRD-UAX-AL (MAJ Lacy)  
Bldg 105, 4300 Goodfellow Boulevard  
St. Louis, MO 63120

Commander  
US Army Aviation Systems Command  
ATTN: DRSAB-ED  
4300 Goodfellow Boulevard  
St. Louis, MO 63120

US Army Aviation Systems Command  
Library & Information Center Branch  
ATTN: DRSAB-DIL  
4300 Goodfellow Boulevard  
St. Louis, MO 63120

Commanding Officer  
Naval Biodynamics Laboratory  
P.O. Box 24907  
New Orleans, LA 70189

Federal Aviation Administration  
Civil Aeromedical Institute  
CAMI Library AAC 64D1  
P.O. Box 25082  
Oklahoma City, OK 73125

US Army Field Artillery School  
ATTN: Library  
Snow Hall, Room 14  
Fort Sill, OK 73503

Commander  
US Army Academy of Health Sciences  
ATTN: Library  
Fort Sam Houston, TX 78234

Commander  
US Army Health Services Command  
ATTN: HSOP-SO  
Fort Sam Houston, TX 78234-6000

Commander  
US Army Institute of Surgical Research  
ATTN: SGRD-USM (Jan Duke)  
Fort Sam Houston, TX 78234-6200

Director of Professional Services  
AFMSC/GSP  
Brooks Air Force Base, TX 78235

US Air Force School of  
Aerospace Medicine  
Strughold Aeromedical Library  
Documents Section, USAFSAM/TSK-4  
Brooks Air Force Base, TX 78235

US Army Dugway Proving Ground  
Technical Library  
Bldg 5330  
Dugway, UT 84022

Dr. Diane Damos  
Psychology Department  
Arizona State University  
Tempe, AZ 85287

US Army Yuma Proving Ground  
Technical Library  
Yuma, AZ 85364

US Army White Sands Missile Range  
Technical Library Division  
White Sands Missile Range  
New Mexico, 88002

US Air Force Flight Test Center  
Technical Library, Stop 238  
Edwards Air Force Base, CA 93523

US Army Aviation Engineering  
Flight Activity  
ATTN: SAVTE-M (Tech Library) Stop 217  
Edwards Air Force Base, CA 93523-5000

Commander  
Code 3431  
Naval Weapons Center  
China Lake, CA 93555

US Army Combat Developments  
Experimental Center  
Technical Information Center  
Bldg 2925  
Fort Ord, CA 93941-5000

Aeromechanics Laboratory  
US Army Research &  
Technical Laboratories  
Ames Research Center, M/S 215-1  
Moffett Field, CA 94035

Commander  
Letterman Army Institute of Research  
ATTN: Medical Research Library  
Presidio of San Francisco, CA 94129

Sixth US Army  
ATTN: SMA  
Presidio of San Francisco, CA 94129

Director  
Naval Biosciences Laboratory  
Naval Supply Center, Bldg 844  
Oakland, CA 94625

Col G. Stebbing  
USDAO-AMLO, US Embassy  
Box 36  
FPO New York 09510

Staff Officer, Aerospace Medicine  
RAF Staff, British Embassy  
3100 Massachusetts Avenue, NW  
Washington, DC 20008

Canadian Society of Aviation Medicine  
c/o Academy of Medicine, Toronto  
ATTN: Ms. Carmen King  
288 Bloor Street West  
Toronto, Ontario M5S 1V8

Canadian Air Line Pilot's Association  
MAJ J. Soutendam (Retired)  
1300 Steeles Avenue East  
Brampton, Ontario, L6T 1A2

Canadian Forces Medical Liaison Officer  
Canadian Defence Liaison Staff  
2450 Massachusetts Avenue, NW  
Washington, DC 20008

Commanding Officer  
404 Squadron CFB Greenwood  
Greenwood, Nova Scotia BOP 1N0

Officer Commanding  
School of Operational &  
Aerospace Medicine  
DCIEM, P.O. Box 2000  
1133 Sheppard Avenue West  
Downsview, Ontario M3M 3B9

National Defence Headquarters  
101 Colonel By Drive  
ATTN: DPM  
Ottawa, Ontario K1A 0K2

Canadian Army Liaison Office  
Bldg 602  
Fort Rucker, AL 36362

Netherlands Army Liaison Office  
Bldg 602  
Fort Rucker, AL 36362

German Army Liaison Office  
Bldg 602  
Fort Rucker, AL 36362

British Army Liaison Office  
Bldg 602  
Fort Rucker, AL 36362

French Army Liaison Office  
Bldg 602  
Fort Rucker, AL 36362

**END**

**FILMED**

**6-85**

**DTIC**